




**VaproLiqui-Flash** is a liquid applied **Waterproof Flashing** material for window and door interfaces. It is designed for use with VaproShield Sheet Membranes in Air Barrier and Weather Resistive Barrier applications. The chart and images below help to calculate how many VaproLiqui-Flash sausages you will need when using either VaproFlashing SA Self-Adhered, VaproFlashing, RevealFlashing.



VAPROLIQUI-FLASH : 1 Sausage  
Flashing: VAPROFLASHING SA  
SELF-ADHERED  
Rough Opening = 5' x 5' x 4"

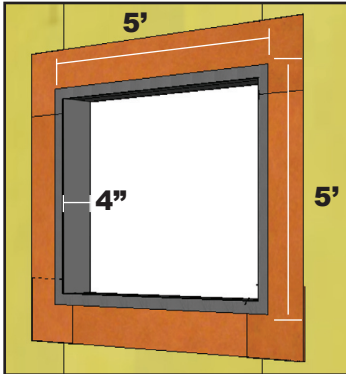

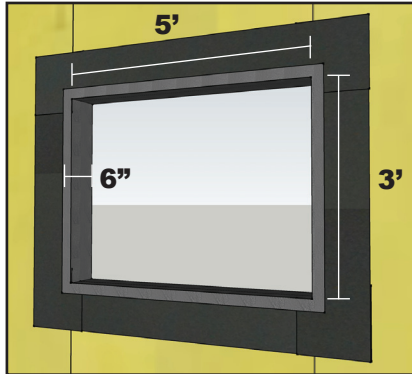

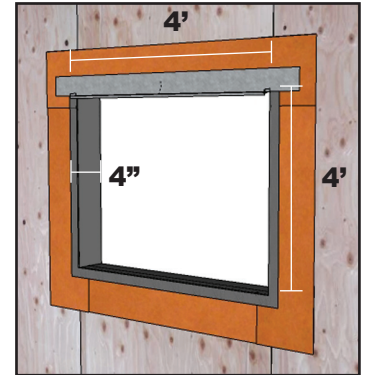VAPROLIQUI-FLASH : 1 Sausage  
Flashing: REVEALFLASHING  
MECHANICALLY ATTACHED  
Rough Opening = 5' x 3' x 6"



VAPROLIQUI-FLASH : 1 Sausage  
Flashing: VAPROFLASHING  
MECHANICALLY ATTACHED  
Rough Opening = 4' x 4' x 4"

## VAPROLIQUI-FLASH WINDOW FLASHING COVERAGE

ROUGH OPENING DIMENSIONS			VAPROFLASHING SA SELF-ADHERED	VAPROFLASHING or REVEALFLASHING MECHANICALLY ATTACHED
HEIGHT (FEET)	WIDTH (FEET)	DEPTH (INCHES)	# OF SAUSAGES 	# OF SAUSAGES 
4	3	4	0.51	0.77
4	3	6	0.70	0.97
5	3	4	0.58	0.88
5	3	6	0.80	1.11
4	4	6	0.80	1.11
5	5	4	0.72	1.11
5	5	6	1.00	1.38
6	6	4	.87	1.33
6	6	6	1.20	1.66
2	2	4	0.29	0.44
2	2	6	0.40	0.55

### COVERAGE



VaproLiqui-Flash 12 Sq. Ft.



Dow Corning<sup>®</sup> 758 100 Lin. Ft.