

# Nail Flange Window VaproLiqui-Flash + VaproFlashing SA [Self-Adhered] Sequencing Exploded View

1 VaproFlashing SA Sill Piece applied directly to sheathing + folded 2.75" inside of R.O. \*Release paper left on lower 6" to shingle over field membrane

2 VaproFlashing SA Jamb Pieces applied directly to sheathing + folder 2.75" inside of R.O.

3 VaproFlashing SA Sill Pieces applied directly to sheathing + folder 2.75" inside of R.O.


4 VaproLiqui-Flash @ inside rough opening + 2" on face

5 Head flashing (by others) over VaproLiqui-Flash embedded in Dow 758

6 Window with Nailing Flange

7 Dow 758 Sealant @ head, left and right jamb flanges

8 - WrapShield SA  
- WrapShield IT  
- RevealShield  
- WrapShield HS field membrane shingled over flashing and sealed with Dow 758 for mechanically attached Membranes

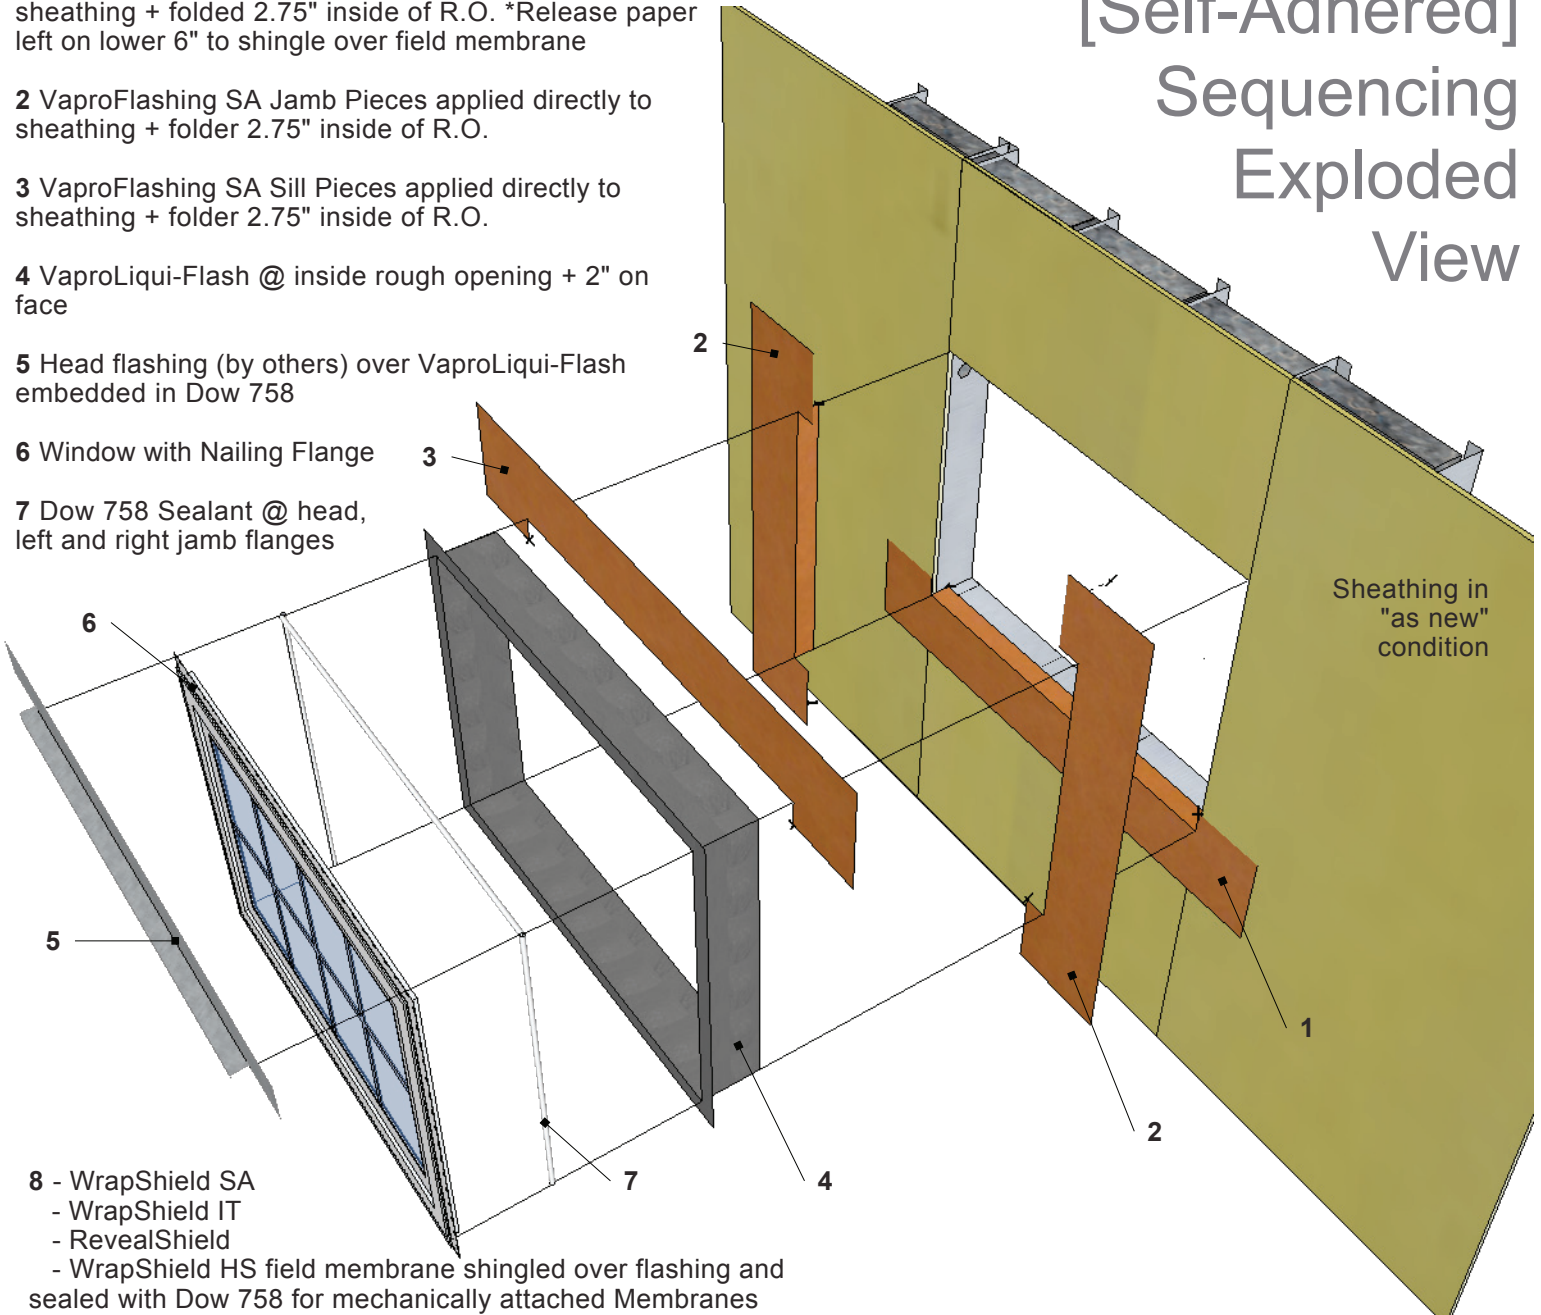

## VAPROLIQUI-FLASH

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiqui-Flash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

### DESCRIPTION:

WrapShield SA, IT, HS, or RevealShield combined with VaproLiqui-Flash + VaproFlashing help facilitate continuous air barriers over gypsum or plywood sheathing, concrete, and CMU substrates.

DRAWN BY: AFG DATE: 23.09.2012