

VaproLiqui-Flash +
RevealFlashing SA
[Self Adhered]
Sequencing
Exploded
View

1 RevealFlashing SA Sill Piece applied directly to sheathing + folded 2.75" inside of R.O. *Release paper left on lower 6" to shingle over field membrane

2 RevealFlashing SA Jamb Pieces applied directly to sheathing + folder 2.75" inside of R.O.

3 RevealFlashing SA Sill Pieces applied directly to sheathing + folder 2.75" inside of R.O.


4 VaproLiqui-Flash @ inside rough opening + 1" on face

5 Head flashing (by others) over VaproLiqui-Flash embedded in Dow 758

6 Commercial Window sealant joint + backer rod (by others)

7 RevealShield SA or RevealShield IT field membrane shingled over flashing [sealed w/ Dow 758 for mechanically attached Membranes]

Sheathing in "as new" condition

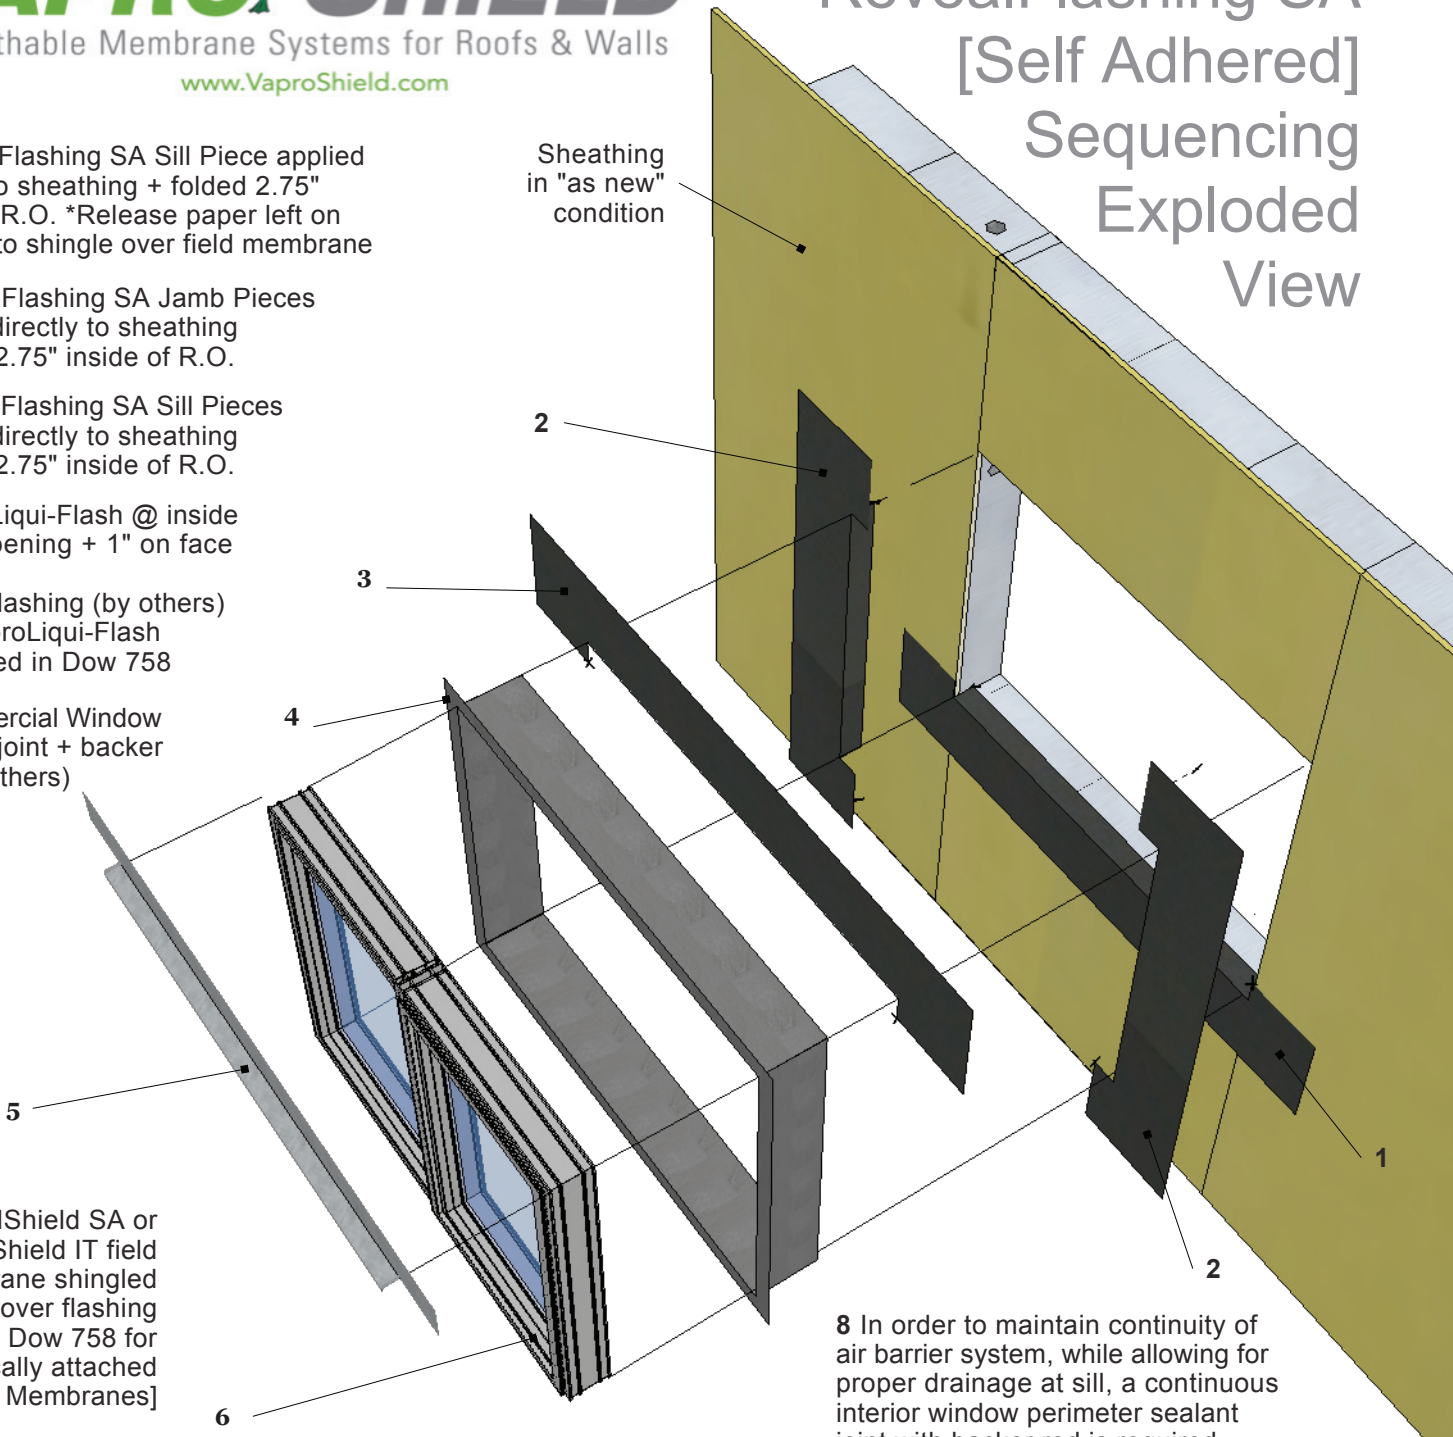

8 In order to maintain continuity of air barrier system, while allowing for proper drainage at sill, a continuous interior window perimeter sealant joint with backer rod is required.

VAPROLIQUI-FLASH

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiqui-Flash is designed to work with RevealFlashing SA and VaproShield field membranes as a complete system.

DESCRIPTION:

RevealShield SA or RevealShield IT combined with VaproLiqui-Flash + RevealFlashing help facilitate continuous air barriers behind open joint cladding applications over multiple substrate varieties.

DRAWN BY: AFG DATE: 06.16.2014

